

Roller Shutter Contact

Grade 3 Class III

ADI
PRO

Angled Magnetic
Contact with Integral
Resistors &
Magnetic Tamper.



Features

ADIRSA-G3C3-M-0.5M

GRADE 3 CLASS III

8 Core Cable & Integral Resistors

0.5m Armoured Fly Lead

Fixing Screws Provided

Contact Dimensions - 82.5mm x 27mm x 25mm

Temperature Range -40 to +50 °C

3 Years Warranty

UPC: 840049308282

PART #: ADIRSA-G3C3-M-0.5M

For more information contact
your ADI sales person or visit us
at www.adiglobal.com

Rev: June 23



Roller Shutter Contact

ADIRSA-G3C3-M-0.5M




Operation: Contact will operate with a gap of approximately 35mm between the magnet and reed this will break at 45mm, the distance will vary near magnetic surfaces.

Installation: Start by fixing the backplate to the mounting surface using the fixing holes provided. Ensure the distance between the magnet and contact is less than 35mm - (around 15mm). It is essential to ensure that the contact and magnet line up horizontally to within 5mm of each other. Tamper or fault issues will arise from misaligned units.

Single Zone Wiring.

Connect your zone wires as shown in the table below. Where two colours are listed, they are intended to be joined together to form the zone wire. We recommend joining wires in a suitable junction box. A Honeywell (1k/1k) example is shown for reference.

PANEL	EOL	ALARM	Wiring to panel	
			Connection 1	Connection 2
Honeywell / Ademco	1k	1k	BLACK	GREEN & BLUE
Europlex (3GS & Apex)	2k2	2k2	RED & YELLOW	GREEN & BROWN
Castle, Menvier, Pyronix (PCX), Scantronic, Texecom (Premier)	2k2	4k7	RED & YELLOW	GREEN & WHITE
Siemens & Aritech, Pyronix (Matrix)	4k7	4k7	YELLOW	GREEN & WHITE
Gardtec	4k7	6k8	YELLOW	GREEN
Guardall**	4k1	8k2	RED	GREEN

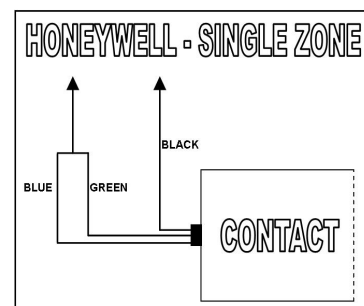

**For Guardall panels, join the blue and white wires together.

Ensure that unused/trimmed wires are insulated. Shorting of unused wires will affect operation.

Shared Zone Wiring:

Two contacts can be used in the same zone, refer to the table and diagrams below for set up instructions. Using a suitable junction box for joining wires is strongly recommended.

PANEL	EOL	ALARM	Contact 1 wiring		Contact 2 wiring	
WIRING NOTE	-	-	ZONE WIRE(S)	JOIN THESE WIRES IN JUNCTION BOX	ZONE WIRE(S)	ZONE WIRE(S)
Honeywell, Ademco	1k	1k	Orange	Green & Blue	Black	Green + Blue
Europlex (3GS & Apex)**	2k2	4k4	Orange	Green & Brown	Red & Yellow	Green & Brown
Castle, Pyronix (PCX), Texecom (Premier)	2k2	4k7	Orange	Green & White	Red & Yellow	Green & White
Siemens & Aritech, Pyronix (Matrix)	4k7	4k7	Orange	Green & White	Yellow	Green & White
Gardtec	4k7	6k8	Orange	Green	Yellow	Green
Guardall / Menvier/ Scantronic			See wiring diagrams			

**Europlex (3GS/Aplex) - also join the white wire of each contact to its own blue wire

Rev: June 23




Roller Shutter Contact


ADIRSA-G3C3-M-0.5M




Wiring Examples – Honeywell

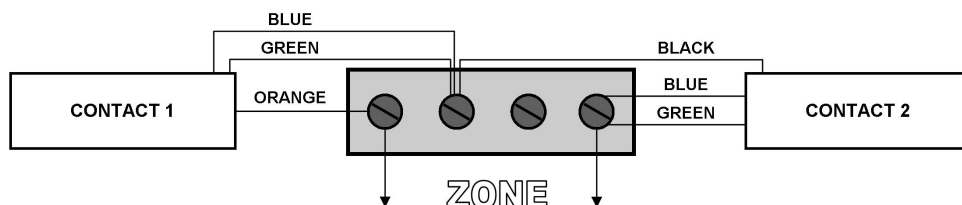

Guardall

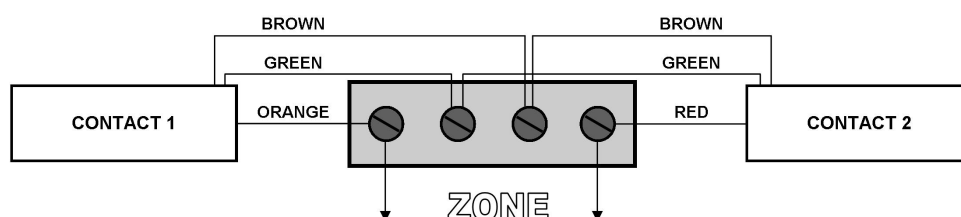

Menvier/Scantronic/Cooper

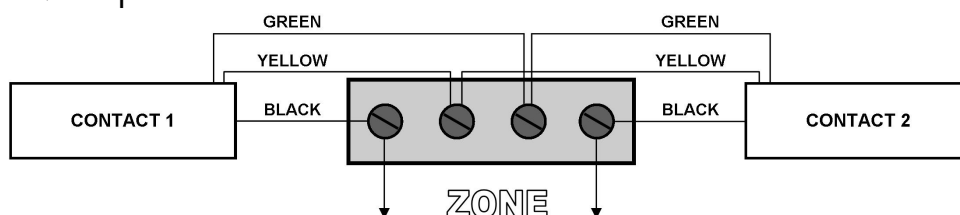

Shared Zone Resistance Table

This table shows the resistance across the zone in each situation. Ensure your panel will not fault/tamper on the following resistances:

PANEL	Contact 1 & 2 SET (closed)	Contact 1 OPEN	Contact 2 OPEN	Contact 1 & 2 OPEN
Honeywell / Ademco	1k	2k	2k	3k
Europlex (3GS & Aplex)	2k2	4k0	4k0	5k8
Castle, Pyronix (PCX), Texecom (Premier)	2k2	6k9	6k9	11k6
Siemens & Aritech, Pyronix (Matrix)	4k7	9k4	9k4	14k1
Gardtec	4k7	11k5	11k5	18k3
Guardall	4k1	7k5	7k5	8k6
Menvier/Scantronic	2k	6k	6k	7k6

Rev: June 23

