

IP65



WASNX



WASNX



WASNX

DESCRIPTION

The WASNX washer pump is an important element for effective video surveillance because it guarantees sharp images in all environmental conditions and reduces the need for maintenance.

The WASNX system is designed to operate in special environments such as marine, industrial, chemical and where the external conditions are highly corrosive.

The wash system is also compatible with third-party products.

The kit includes a stainless steel 10-litre tank with solenoid valve.

MAIN FEATURES

Enclosure made of stainless steel AISI 316L

Delivery head: 20m (66ft) or 30m (98ft)

Water tank capacity: 10l (2.6gal)

Suitable for Videotec products or with third-party products

Operating temperature: from -20°C (-4°F) up to +60°C (140°F)

Available voltages: 230Vac, 120Vac, 24Vac

IP protection degree (EN60529): IP65 (solenoid valve only, enclosure not rated)

TECHNICAL DATA

MECHANICAL

Materials

- Enclosure made of stainless steel AISI 316L !da duplicazione!: Stainless steel AISI 316L
- Antistatic delivery water pipe: Antistatic plastic

Antistatic delivery water pipe (supplied)

- Length: 20m (66ft)

Pressure: 6bar max

Delivery head

- 20m (66ft), 4bar
- 30m (98ft), 6bar (with accessory tube, WEXTUB30)

Water tank capacity: 10l (2.6gal)

Dimensions (WxHxL): 429x697x255mm (16.9x27.4x10in)

Unit weight: 18kg (40lb)

ELECTRICAL

Supply voltage/Current consumption

- 230Vac, 0.07A, 50/60Hz
- 120Vac, 0.13A, 50/60Hz
- 24Vac, 0.7A, 50/60Hz

ENVIRONMENT

For indoors and outdoors installation

Operating temperature of solenoid valve: from -20°C (-4°F) up to +60°C (140°F)

Operating temperature of device: depending on the solidification temperature of the liquid

Relative humidity: from 5% up to 95%

CERTIFICATIONS

Electrical safety (CE): EN60950-1

Electromagnetic compatibility (CE): EN61000-6-2, EN61000-6-3

Outdoor installation (CE): EN60950-22

IP protection degree (EN60529):

- IP65 (solenoid valve only, enclosure not rated)

EAC certification

PART NUMBER

WASNX1V10L20M00	Tank 10l (2.6gal) with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 230Vac
WASNX2V10L20M00	Tank 10l (2.6gal) with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 24Vac
WASNX3V10L20M00	Tank 10l (2.6gal) with integrated manual pump controlled by solenoid valve, delivery head up to 20m (66ft) max, IN 120Vac

ACCESSORIES

WEXTUB30	Antistatic delivery water pipe, 30m (98ft)
----------	--

BRACKETS AND ADAPTORS

NXCOL	AISI 316L stainless steel pole adapter module
NXCW	AISI 316L stainless steel corner adapter module

SPARE PARTS

OWEXMANB	1/8" pressure gauge
OWEXTANKB	Pump in stainless steel, 10l (2.6gal)
OWEXTUB	Antistatic delivery water pipe, 20m (66ft)


PACKAGE

Model Number	Weight	Dimensions (WxHxL)	Master carton
WASNX1V10L20M00	20.3kg (44.7lb)	30x74x46cm (11.8x29.1x18.1in)	-
WASNX2V10L20M00	20.3kg (44.7lb)	30x74x46cm (11.8x29.1x18.1in)	-
WASNX3V10L20M00	20.3kg (44.7lb)	30x74x46cm (11.8x29.1x18.1in)	-

WASNX - CONFIGURATION OPTIONS				
	Voltage	Water tank capacity	Delivery head	
WASNX	1V 230Vac	10L 10l (2.6gal)	20M 20m (66ft)	00
	2V 24Vac			
	3V 120Vac			

TECHNICAL DRAWINGS

The indicated measurements are expressed in millimetres.

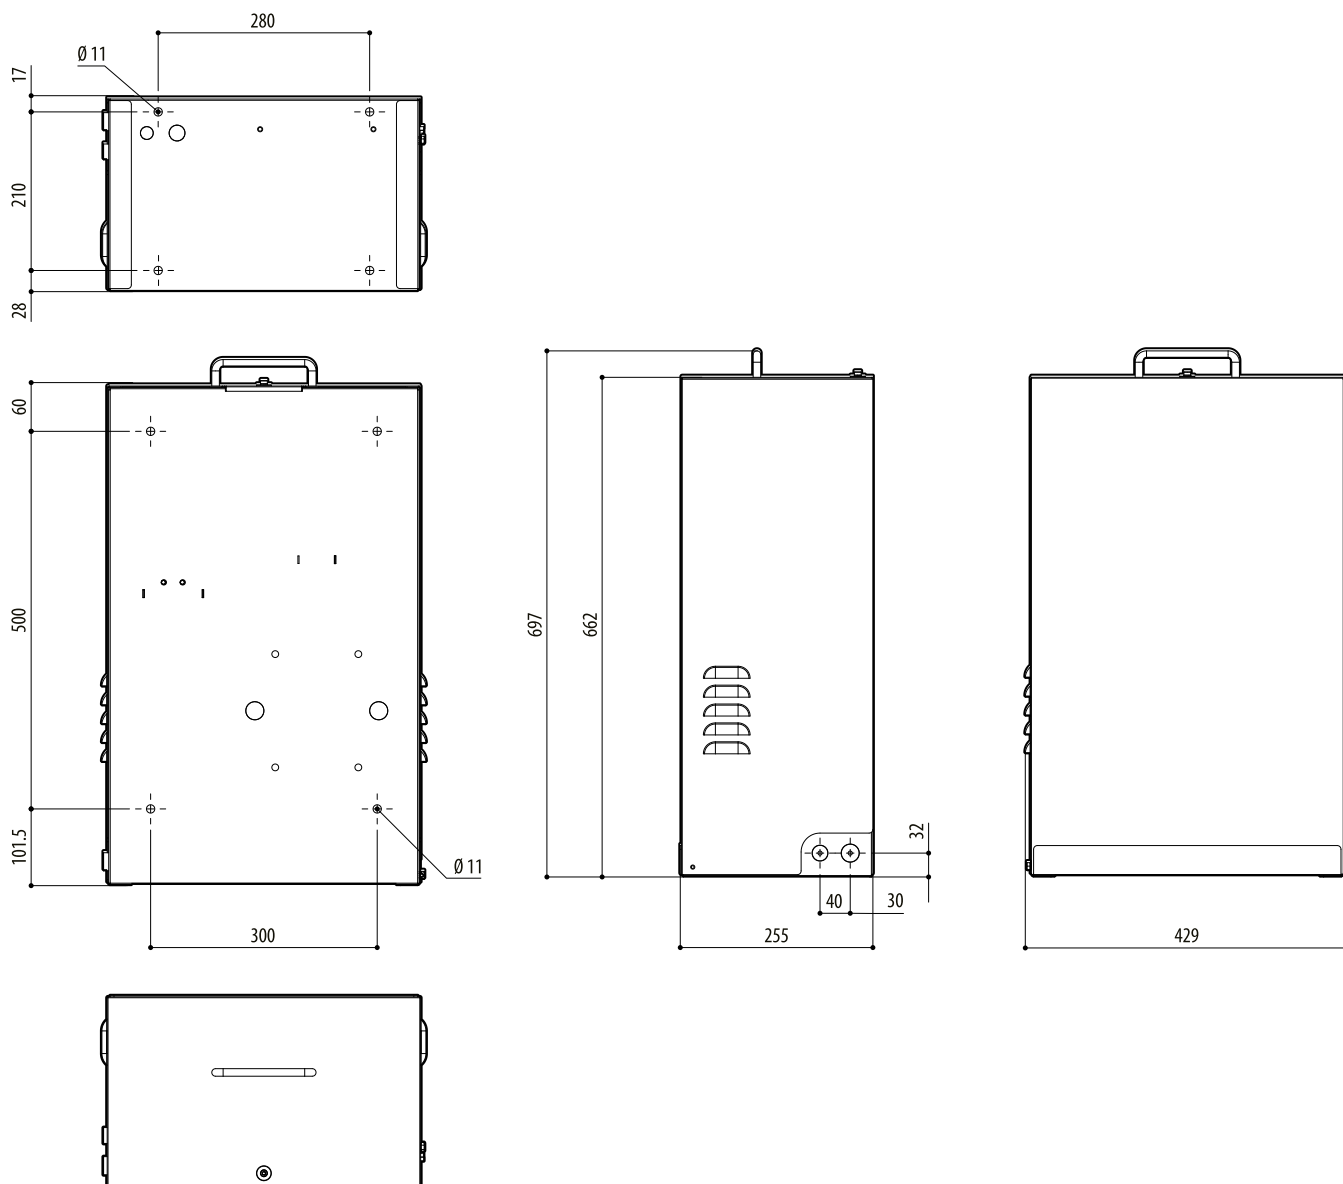

WASNX