

# UHI-OG(S)-0 Indoor Camera Housing

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Protects camera/lens combinations up to 317 mm (12.48 in) length
- ▶ Hinged side opening for easy installation and camera setup
- ▶ Strong aluminum construction
- ▶ Cable routing through base or rear of housing
- ▶ Tamper-resistant

The Indoor Camera Housing is a smartly styled unit, intended for use inside. This housing is both cost-competitive and installer-friendly.

## Functions

### Easy installation

The unique, hinged, side-opening design provides easy installation of all camera/lens combinations, and allows access to most camera and lens controls when the housing is mounted. Route power, video, and lens control cabling through the liquid-tight fittings in the bottom rear of the housing, or for even better cable management, via the feed-through entry holes in the base. Mounting holes in the base permit installation to a wide range of pan/tilts, adjustable heads, and various camera-mounting brackets.

### Dinion ready

This housing supports installation of Dinion style cameras with fixed focal, varifocal, or up to a 15x motorized zoom lens.

### Secure


For increased security, the units come with tamper-resistant screws for the locking clasps to prevent illegitimate access to the housing contents. The housing is an optimal solution for protecting your indoor video surveillance applications.

## Certifications and approvals


Safety	acc. to EN 60950-1 (CE)
	acc. to UL 2044-1; CAN/CSA C 22.2 no. 1-98
Immunity	acc. to EN 50130-4 (CE)
Emission	acc. to EN 55022 class B (CE)
	acc. to EN 61000-3-2 (CE); EN 61000-3-3 (CE)
	acc. to FCC CFR 47 Part 15, Class B

Region	Certification	
Europe	CE	UHI-OGx

## Installation/configuration notes

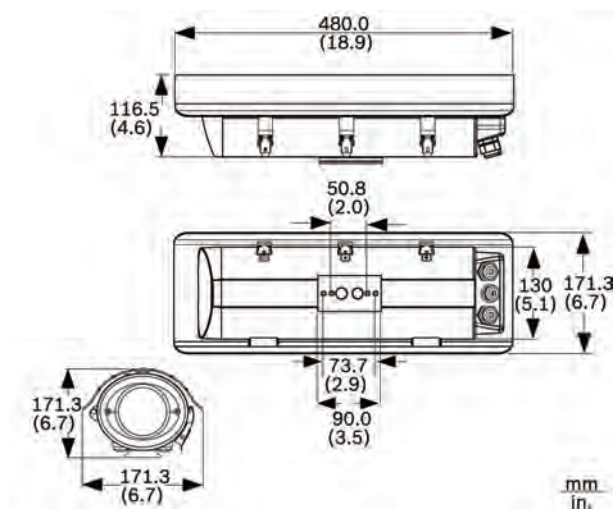

Dimensions in mm for UHI-OG(S)-0 housings indoor units

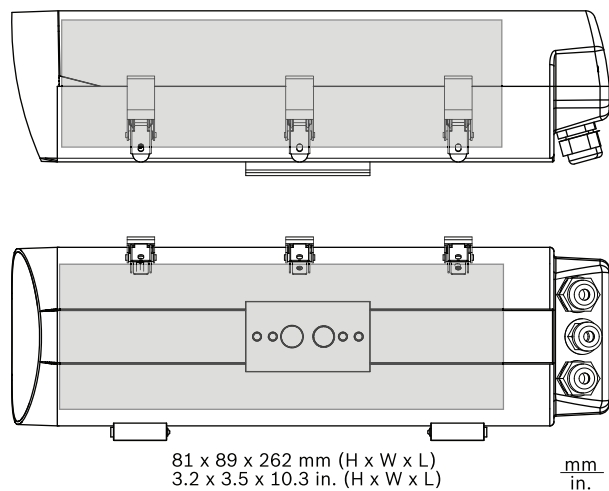

Dimensions in mm maximum internal usable space available (based on camera/lens size)



### Notice

Allowance is provided for wiring and connector space requirements

## Parts included

Quantity	Component
1	UHI-OG-0 Indoor Housing
1	Sunshield (UHI-OGS-0 only)

## Technical specifications

### Electrical/Mechanical

Rear fitting	1 x, cable diameter 4.0 to 7.0 mm (0.16 to 0.28 in)
Rear fittings	2 x, cable diameter 6.5 to 10.5 mm (0.26 to 0.42 in)
Bottom feeds	2 x, cable diameter 4.0 to 7.0 mm (0.16 to 0.28 in)
Window	3 mm (0.12 in) glass
Locking clasps	Tamper-resistant screws provided
Camera power ratings	24/120/230 VAC, 50/60 Hz, 6.3 A
Camera mounting	Removable camera/lens tray, mounted with two screws
Max camera + lens size (H x W x L)	81 x 89 x 317 mm (3.19 x 3.50 x 12.48 in)
Construction	Aluminum casing, neoprene gaskets, all stainless steel hardware
Dimensions	See drawings
Weight	2.3 kg (5.1 lb)
Mounting	2 x pair of tapped holes
thread	1/4-20
inner pair	50.8 mm (2.0 in) center spread
outer pair	73.7 mm (2.9 in) center spread
Color	Gray

### Environmental

Operating temperature	-40 °C to +50 °C (-40 °F to +122 °F)
Enclosure protection	IP66, NEMA-4X

## Ordering information

### UHI-OG-0 Indoor Housing

Order number **UHI-OG-0**

### UHI-OGS-0 Indoor Housing with Sunshield

Order number **UHI-OGS-0**

**Represented by:****Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com