


MC 240-S45

Magnetic Contact in Al Housing, NC




Technical data

| | |
|-----------------------------------|--|
| Installation method | Surface mount |
| Contact function | Normally Closed (NC) |
| Approvals | EN 50131-2-6 Grade 2, Class IIIA, VdS G 193513 Class B, INCERT B-582-0013, SBSC 9-196, Class 2 |
| Contact rating | 48 VDC / 500 mA / 10 VA |
| Magnet type | Alnico 5 |
| Make distance (wood) mm | 42 |
| Make distance (steel) mm | X |
| Tamper protection | Yes |
| Connection | Cable |
| Housing material | Aluminium |
| Operating temperature range | -40°C - +70°C |
| Housing protection class | IP 67 |
| Contact dimensions (L x W x H) mm | 74 x 25 x 15 |
| Magnet dimensions (L x W x H) mm | 74 x 25 x 15 |
| Grade | 2 |

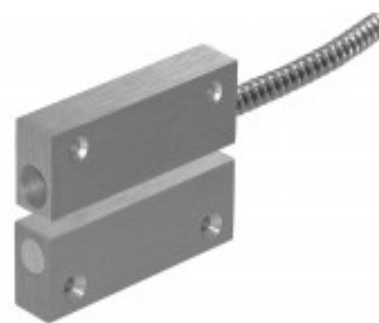

The MC 240-S45 set is intended for exposed environments where a more durable magnetic contact is needed, such as doors, gates, etc. The set consists of MC 240-C contact with a NC contact function installed in MC 200-4 Al housing and an extra strong magnet in MC 200-5 Al housing, which allows for a wide opening gap. MC 240-S45 set contains a 1 m long stainless steel cable protection (MC T4).

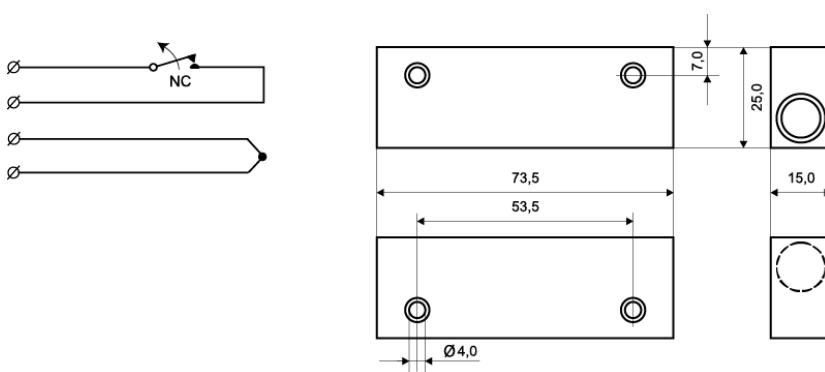

ORDERING INFORMATION

| Model | Description |
|------------|---------------------------------|
| MC 240-S45 | Magnetic contact set, 6 m cable |