


MC 447

Magnetic Contact,
Surface mount, 2 x NC

Technical data

| | |
|-----------------------------------|--|
| Installation method | Surface mount |
| Contact function | Double (2 x) NC |
| Approvals | EN 50131-2-6 Grade 2, Class II, INCERT B-582-0013, SBSC 9-213, Class 1/2, FG |
| Contact rating | 48 VDC / 500 mA / 10 VA |
| Magnet type | Alnico 5 |
| Mounting on steel | Possible without accessories |
| Make distance (wood) mm | 25 |
| Make distance (steel) mm | 12 |
| Connection | Screw terminals |
| Housing material | ABS Plastic |
| Operating temperature range | -40°C - +70°C |
| Housing protection class | IP 43 |
| Contact dimensions (L x W x H) mm | 65 x 20 x 15 |
| Magnet dimensions (L x W x H) mm | 65 x 14 x 10 |
| Grade | 2 |

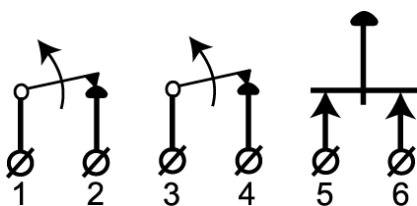






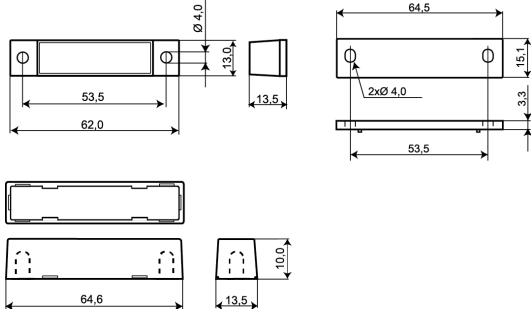

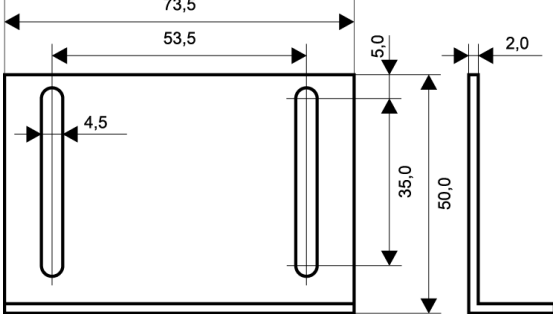

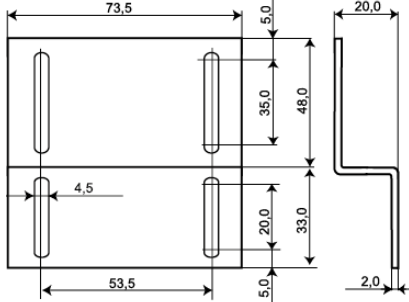
MC 447 is a surface mount magnetic contact with double NC function and 6 screw terminals. It can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorised opening.

It has screw terminals with wire protection and a sabotage contact. Enclosed are plastic spacers for installation on steel. The contact can be supplemented with different accessories such as brackets and extra strong magnets.

ORDERING INFORMATION

| Model | Description |
|--------|---|
| MC 447 | Magnetic Contact, Surface mount, 2 x NC |

Related products and accessories

| | | |
|---|---|--|
|  | <p>MC 400-3</p> <p>Plastic Spacer Contact Part for MC 400 Series</p> |  |
|  | <p>MC 400-4</p> <p>Plastic Spacer Magnet Part for MC 400 Series</p> |  |
|  | <p>MC 400-MX</p> <p>Magnet Part with Strong Magnet for MC 400 series</p> |  |
|  | <p>MC L</p> <p>Installation L- Bracket</p> |  |
|  | <p>MC Z</p> <p>Installation Z- Bracket</p> |  |